

CNS106II WALL MOUNT SPEAKER

TECHNICAL DATA SHEET




FEATURES:

- With multiple terminals, suitable for different occasions.
- Equipped with hanging holes for convenient installation.
- High-quality engineering plastic injection molding, durable, no deformation, no fading
- Adopt damping treatment for the speaker, with long service life, high sensitivity, clear and bright sound.

SPECIFICATIONS:

Model	CNS106II
Speaker Unit	6.5"×1, 2"×1
Rated Power	10W
Line Voltage	70V/100V
Sensitivity (1m, 1W)	92±2dB
MAX. SPL. (1m)	100±2dB
Effective Frequency Range	160Hz-18kHz
Weight	1.75kg



INSTALLATION:

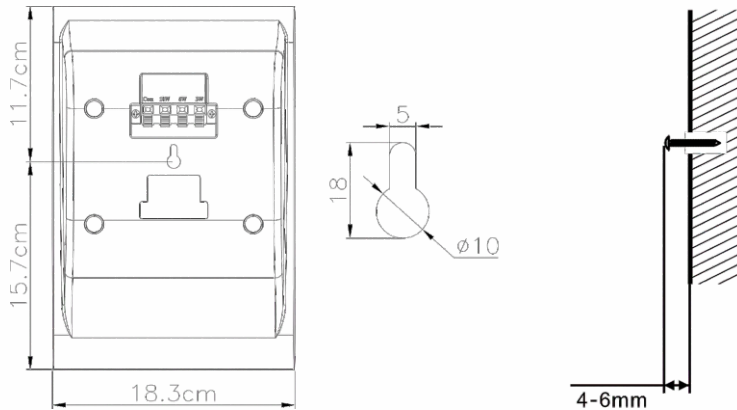

1. Install a nail with a diameter of 4mm on the wall where the speaker needs to be installed, and leave a distance of 4-6mm between the nail cap and the wall (see the figure above).
2. Connect the audio broadcast transmission line, and select the appropriate terminal for connection based on the actual power requirements according to the following table.

Power Terminal	Line Voltage	70V	100V
COM---3W		1.5W	3 W
COM---6W		3 W	6 W
COM---10W		5 W	10W

3. Hang the speaker, adjust the angle of the speaker and check if the installation is firm and reliable.

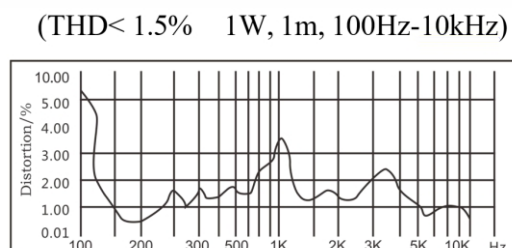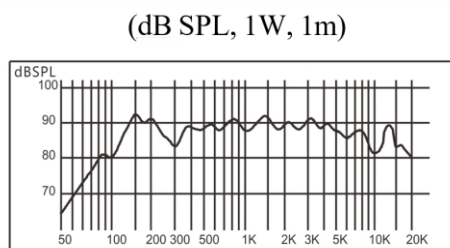

Email: Sales@canscorp.com

Add.: Shop No 5-6, Adinath Alpine building, Plot No. 28 A,
Sector 25, Khandeshwar, Navi Mumbai, Maharastra 410209

Web.: WWW.CANSCORP.COM