

CNS602 6.5" 6W CEILING SPEAKER WITH FIRE DOME

TECHNICAL DATA SHEET



DESCRIPTION.

This 6.5" ceiling speaker combines a modern, RAL white aesthetic with a fire dome for safety. It delivers robust sound while ensuring long-term reliability and protection.

FEATURES:

- Ceiling Loudspeaker adopts the fashionable thin-edge plane big cylinder and the carbon alloy aluminum mesh design with the RAL white coating so as to integrate with any indoor place perfectly.
- Equipped with a 6.5" unit, full-range designed loudspeaker with magnetic circuit encapsulated with special engineering plastic process, and the drum paper formed with tripping and hot pressing of algae salved organisms, for the purpose of super-strong reproduction of voice and music. Maximum sound pressure level 101dB.
- It is in conformity with the IEC 268-5 power handling capacity (PHC) standard, and able to operate continuously for 100 hours and carry out simulating acoustic feedback exposure (SAFE) test. It is able to bear the double rated powers within a short period, so as to ensure the high reliability of the loudspeaker under extreme conditions, prolong the service life, and reduce the possibility of occurrence of fault or degradation of performance to a great extent.


- Equipped with self-extinguishing back cover, enhance the protection of electric cable connection terminal.

SPECIFICATIONS:


Model		CNS602
Speaker Unit		6.5"×1
Rated Power (RMS)		6W
Maximum Power		10W
Rated Voltage	70V	3W/6W
	100V	6W
Sensitivity (1m, 1W)		90dB
Frequency Response		110Hz-15kHz
Storage Temperature		-25~+55
Dimensions		191×105mm
Weight		0.9kg

TECHNICAL PARAMETERS

Frequency Response
(dB SPL, 1m, 1m)

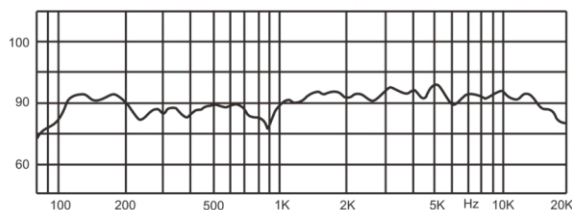

Distortion
(THD < 5% 1W, 1m, 100Hz-10kHz)

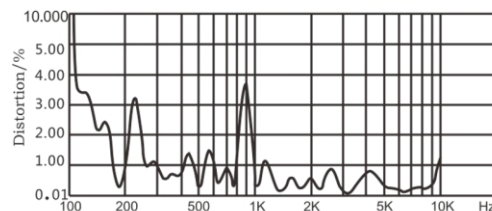

Email: Sales@canscorp.com

Add.: Shop No 5-6, Adinath Alpine building, Plot No. 28 A,
Sector 25, Khandeshwar, Navi Mumbai, Maharashtra 410209

Web.: WWW.CANS CORP.COM