

CNS8062-8063-8064 WALL MOUNT SPEAKER WITH POWER TAP

TECHNICAL DATA SHEET



DESCRIPTION:

This wall-mounted speaker features a sleek minimalist design in black or white, offering professional-grade sound quality with durable, high-quality materials for a clear and robust audio experience.

FEATURES:


- Fashion minimalist design aesthetic atmosphere, white black for choice.
- The integration of professional wall design, fine appearance, sophisticated high-grade filing.
- Focus on sound quality, inverse-phase type design, and equipped with high pitch and low pitch double unit, clear sound level, mellow, transparent, clear and bright, strong bass.
- Rear power adjustable knob, free choice of input mode.
- Mesh: made of 1060 pure aluminium, subject to hardening and anti-oxidation treatment, not easy to cause deformation, and never get rusty.
- Box body: made of UL94V-0 grade fireproof thickened ABS material, durable in use, safe and reliable.
- Driver unit: treble diaphragm is made of natural silk film; and bass diaphragm is made of polypropylene material, 3-3.5 inches magnetic circuit design.
- Mounting bracket: precision rust-proof treatment.

CNS8062-8063-8064 WALL MOUNT SPEAKER WITH POWER TAP

SPECIFICATIONS:


Acoustic System	Model	CNS8062	CNS8063	CNS8064
Power Adjustment	Speaker Unit	4"x1, 1"x1	5"x1, 1"x1	6.5"x1, 1"x1
	Sensitivity (1m, 1W)	90±2dB	90±2dB	91±2dB
	MAX. SPL. (1m)	103±2dB	105±2dB	107±2dB
	Frequency Response	95Hz-20kHz	80Hz-20kHz	65Hz-20kHz
	Rated Power	20W	30W	40W
	70V	20W-15W-8W-4W-2W	30W-15W-8W-5W-2.5W	40W-20W-10W-5W-2.5W
	100V	20W-15W-8W-4W	30W-15W-8W-5W	40W-20W-10W-5W
Other Specifications	8	20W	30W	40W
	in Constant Voltage	70V / 100V	70V/100V	70V/100V
	put Constant Resistance	8	8	8
	Dimensions (H×W×D)	255×176×170mm	280×194×185mm	310×215×203mm
	Net Weight	2.6kg	3.2kg	4.6kg

PRODUCT INFORMATION

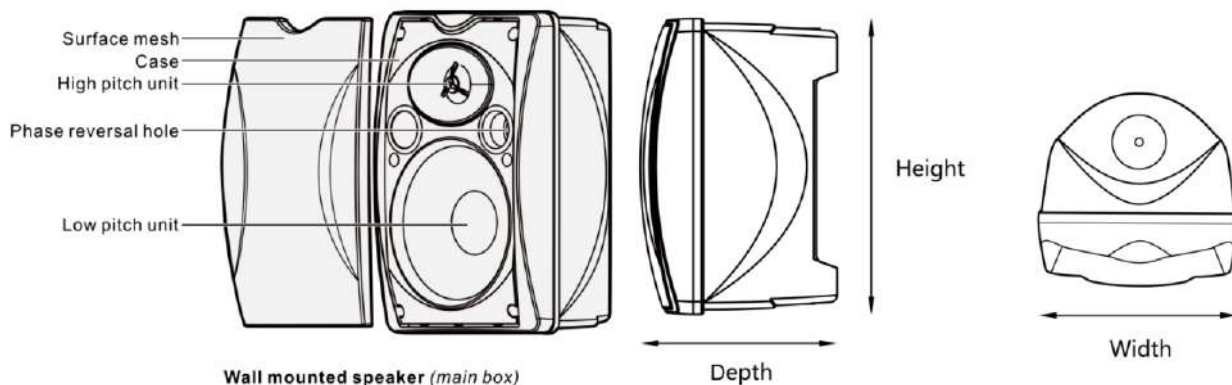


Model	Height	Width	Depth
CNS8062	255	176	170
CNS8063	280	194	185
CNS8064	310	215	203


CNS8062-8063-8064 WALL MOUNT SPEAKER WITH POWER TAP

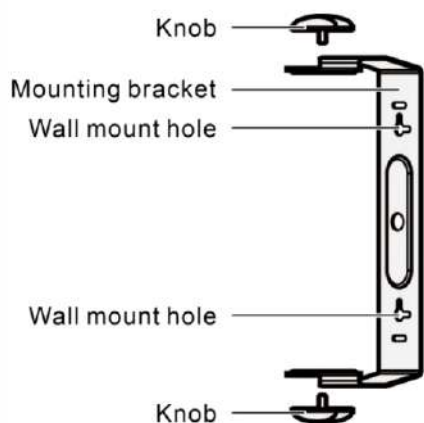

U-shape bracket

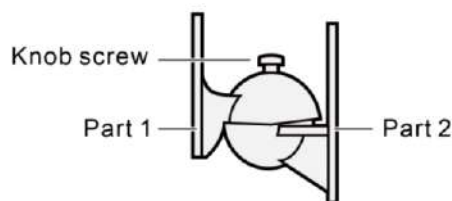


Multi-angle adjustable bracket
(only support purchasing for DSP8063)

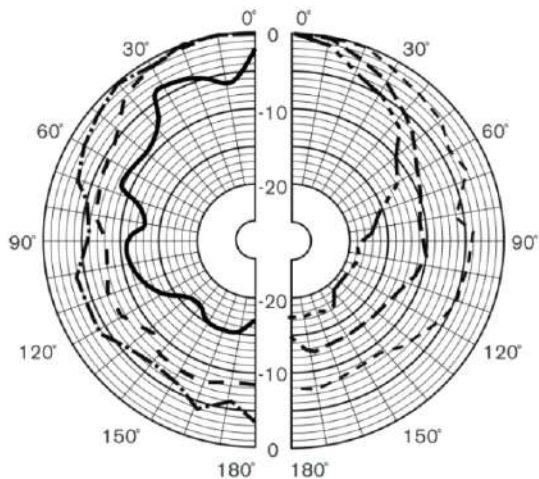

····· 250 Hz	- · - · 2000 Hz
- - - 500 Hz	- - - - 4000 Hz
— 1000 Hz	- · · · 8000 Hz


CNS8062
Vertical Directivity Pattern

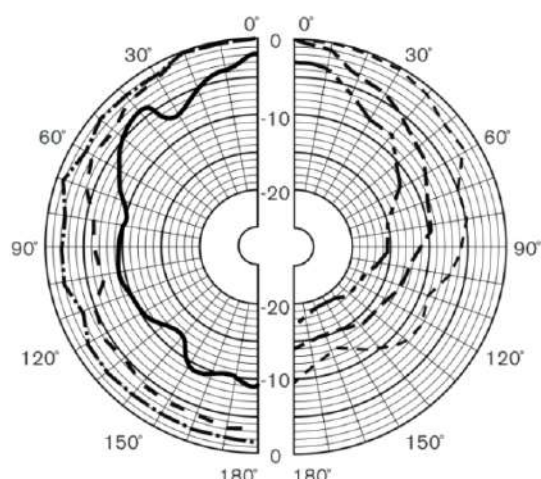


····· 250 Hz	- · - · 2000 Hz
- - - 500 Hz	- - - - 4000 Hz
— 1000 Hz	- · · · 8000 Hz

CNS8062
Horizontal Directivity Pattern


CNS8062-8063-8064 WALL MOUNT SPEAKER WITH POWER TAP

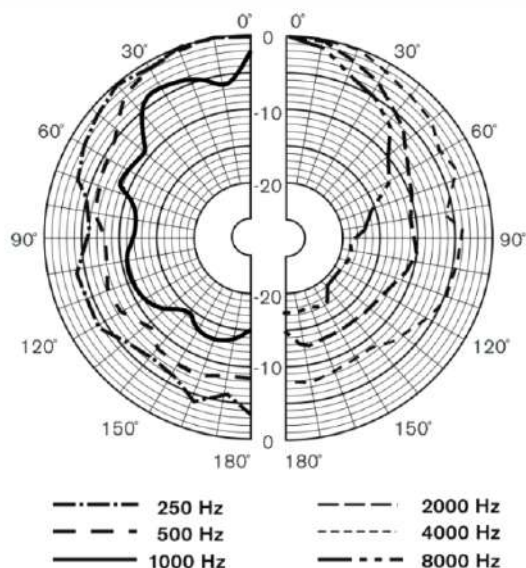


CNS8063
Vertical Directivity Pattern

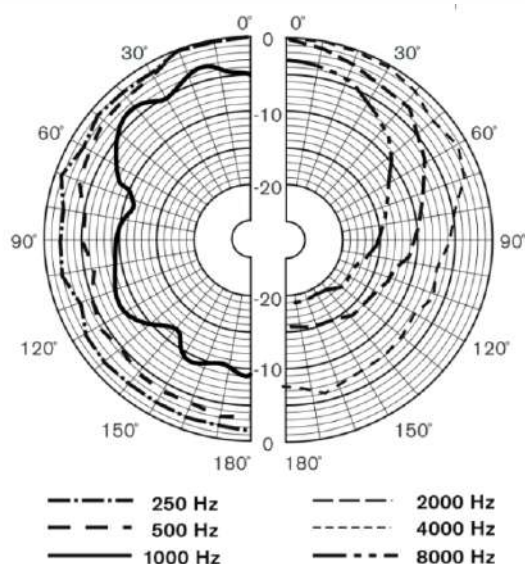

CNS8063
Horizontal Directivity Pattern

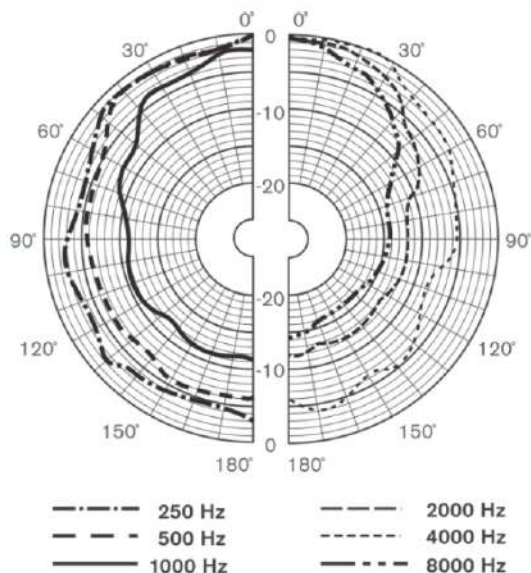


CNS8064
Vertical Directivity Pattern

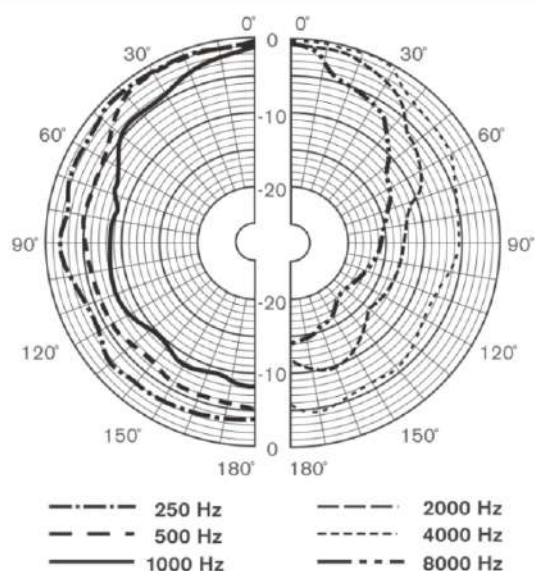


CNS8064
Horizontal Directivity Pattern


CNS8062-8063-8064 WALL MOUNT SPEAKER WITH POWER TAP

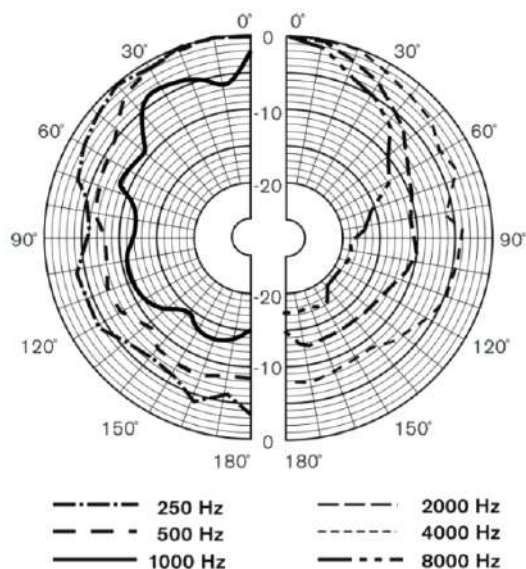


CNS8063
Vertical Directivity Pattern

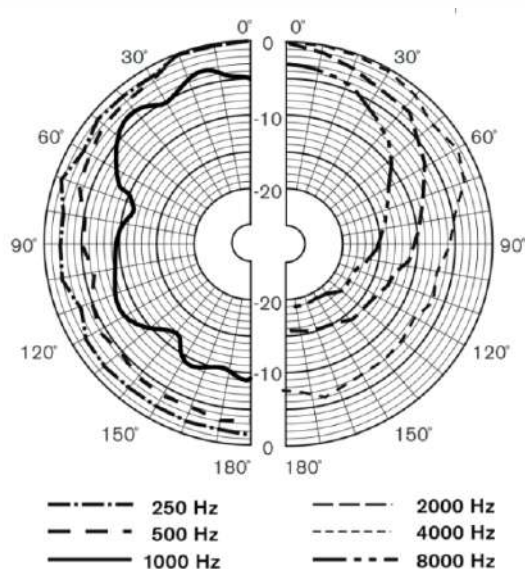

CNS8063
Horizontal Directivity Pattern

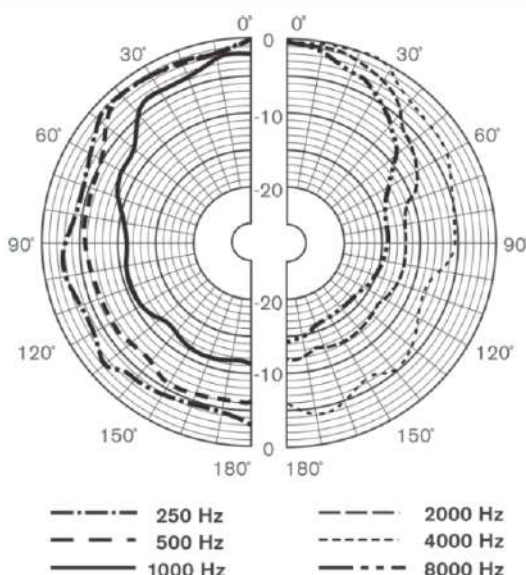

CNS8064
Vertical Directivity Pattern

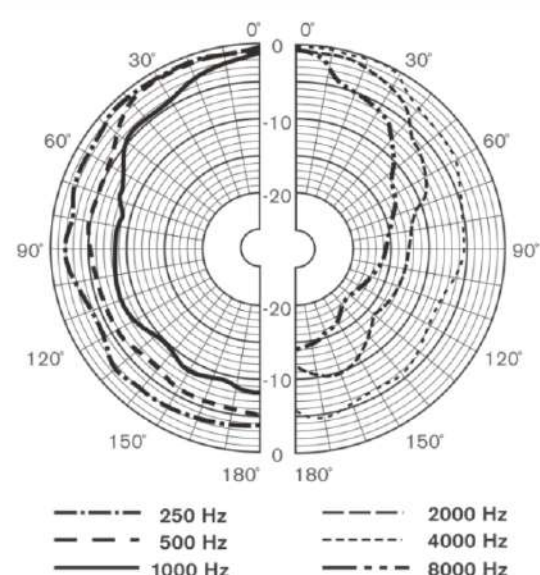


CNS8064
Horizontal Directivity Pattern




CNS8062-8063-8064 WALL MOUNT SPEAKER WITH POWER TAP


**CNS8062 Frequency Response
(dB SPL, 1W, 1m)**

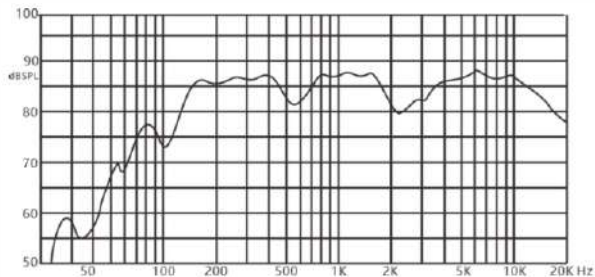


**CNS8062 Distortion
(THD < 5% 1W, 1m, 100Hz-10kHz)**

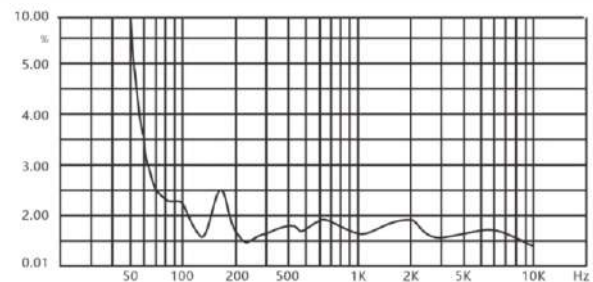


**CNS8063 Frequency Response
(dB SPL, 1W, 1m)**

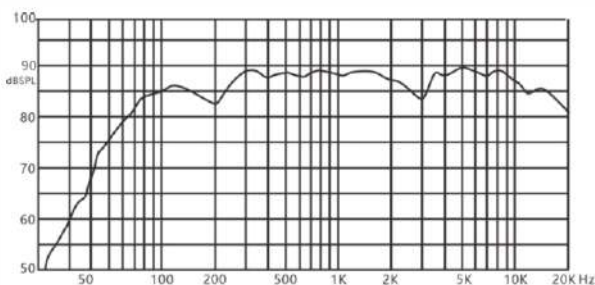


**CNS8063 Distortion
(THD < 5% 1W, 1m, 100Hz-10kHz)**

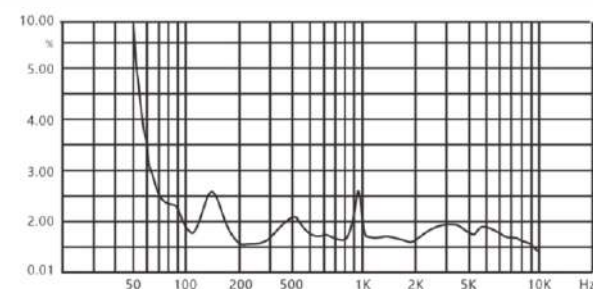

**CNS8064 Frequency Response
(dB SPL, 1W, 1m)**

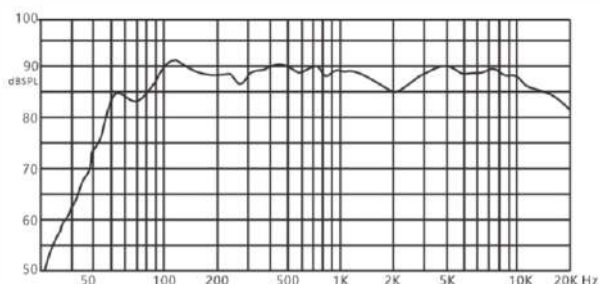

**CNS8064 Distortion
(THD < 5% 1W, 1m, 100Hz-10kHz)**

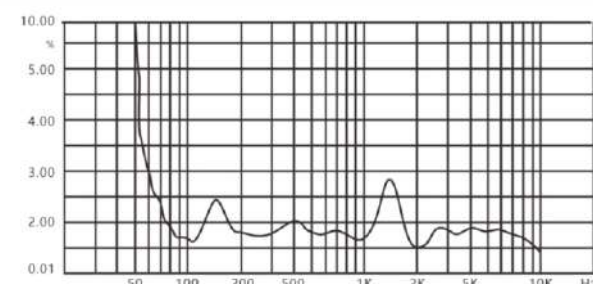

Email: Sales@canscorp.com

Add.: Shop No 5-6, Adinath Alpine building, Plot No. 28 A,
Sector 25, Khandeshwar, Navi Mumbai, Maharastra 410209

Web.: WWW.CANSCORP.COM