




CAT6 STP PATCH CORD

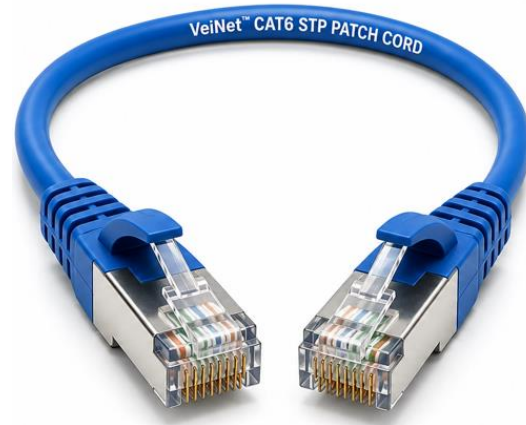

CAT6 STP PATCH CORD

Product Description

D-Link Cat6 patch cords are high-quality four-pair shielded twisted stranded cables terminated with RJ45 modular plugs at both ends. The cables comply with TIA/EIA-568 C.2 standards and help reduce EMI/RFI interference for high-speed data transmission.

APPLICATIONS

- 100BASE-TX Fast Ethernet
- 1000BASE-T
- Power over Ethernet (PoE)

ELECTRICAL / PERFORMANCE PROPERTIES

- Supports 100BASE-TX and 1000BASE-T Ethernet applications.
- Compatible with Power over Ethernet (PoE).
- Shielded construction minimizes EMI and RFI interference.
- Dielectric withstand voltage: 1000V AC for 1 minute.
- Insulation resistance: 500M Ω minimum at 100V DC.
- Complies with TIA/EIA-568 C.2 standards.

TECHNICAL SPECIFICATIONS

- Cat6 STP patch cord with 26 AWG bare copper conductors.
- Shielded cable design reduces EMI/RFI interference.
- RJ45 8P connectors with copper alloy contacts.
- Supports Fast Ethernet, Gigabit Ethernet, and PoE.
- FR-PVC jacket with HD-PE insulation.
- Rated up to 75°C with high insulation resistance.

PART NUMBERS

VNT-C6PCSGRL-1 — Cat6 STP 26AWG Patch Cord, 1M
VNT-C6PCSGRL-2 — Cat6 STP 26AWG Patch Cord, 2M
VNT-C6PCSGRL-3 — Cat6 STP 26AWG Patch Cord, 3M

Canscorp Engineers Private Limited

Specifications are subject to change without notice.
Canscorp is a registered trademark of Canscorp Engineers Pvt Ltd
All other trademarks belong to their respective owners.
©2026 Canscorp Engineers Private Limited. All rights reserved.
Release 01 (February 2026)