

**CNS742C 6.5" Frameless Coaxial Ceiling Speaker  
(5W/10W/20W/40W)**

**TECHNICAL DATA SHEET**



**FEATURES:**

- Commercial public address system ceiling speaker with transformer.
- Hi-fi range coaxial ceiling loudspeaker with fire dome.
- Ideal for school, restaurant, hotel, train station & airport BGM and speech use.
- Rated power output 5W/10W/20W/40W at 100V and 8ohms
- 6.5" coaxial PP driver unit with 1" tweeter
- Line input 100V or 70V & 8Ω.
- ABS enclosure, metal grille and metal back can in white.
- Flush mount in-ceiling quick and secure installation.
- Wide dispersion rang installation PA loudspeaker.




# CNS742C 6.5" Frameless Coaxial Ceiling Speaker (5W/10W/20W/40W)


## SPECIFICATIONS:

<b>Model</b>	<b>CNS742C</b>
Description	6.5" Coaxial Ceiling Speaker
Rated Power Output	5W/10W/20W/40W
Line Input	100V or 70V & 8
Frequency Response	80-18KHz
SPL(@1W/m)	89dB
Speaker Unit	6.5" coaxial PP driver with 1" tweeter
Cutout Size	218mm
Dimension	242x160mm
Material	ABS enclosure, metal grille and metal back can in black
Mounting Way	Flush mount in-ceiling quick and secure installation
Weight	2kg

## SIDE VIEW & DIMENSION:



## SPL VS ANGLE & SPL VS FREQUENCY DIAGRAMS:

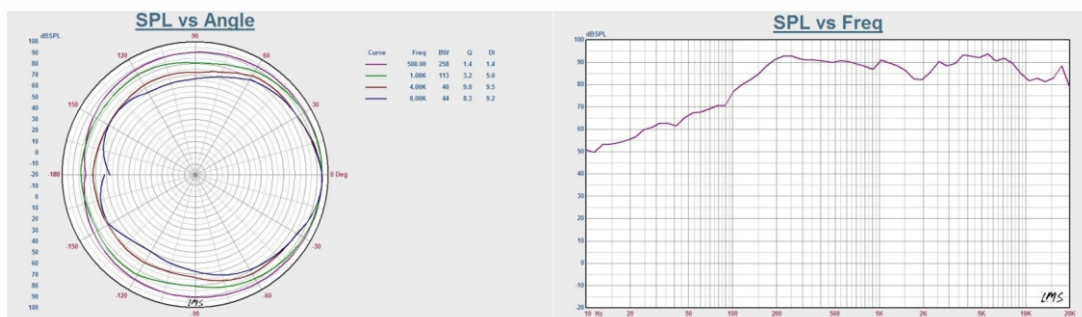

**Email:** Sales@canscorp.com

**Add.:** Shop No 5-6, Adinath Alpine building, Plot No. 28 A,  
Sector 25, Khandeshwar, Navi Mumbai, Maharashtra 410209

**Web.:** WWW.CANSCORP.COM