

TECHNICAL DATA SHEET



WWW.CANSCORP.COM

FEATURES:


- Commercial ceiling speaker with transformer.
- 6.5" ceiling speaker for BGM and PA system use.
- Compact size consistent with spot lighting and architectural design.
- Ideal for school, office, hotel and airport background music system.
- Rated power output 5W-10W at 100V.
- 6.5" full range paper driver unit.
- Line input 100V or 70V.
- ABS enclosure and metal grille in white.
- In-ceiling quick installation by spring clip.

SPECIFICATIONS:

Model	CNS-706
Description	6.5" Ceiling Speaker
Rated Power Output	5W-10W
Line Input	100V or 70V
Frequency Response	90HZ-18KHz
SPL(@1W/m)	96dB ±3db
Speaker Unit	6.5" full range paper cone
Cutout Size	171mm
Dimension	188(D)×80(H)mm
Material	ABS enclosure and metal grille in white
Mounting Way	In-ceiling spring clip quick installation
Weight	0.8kg



FREQUENCY RESPONSE VS SPL:

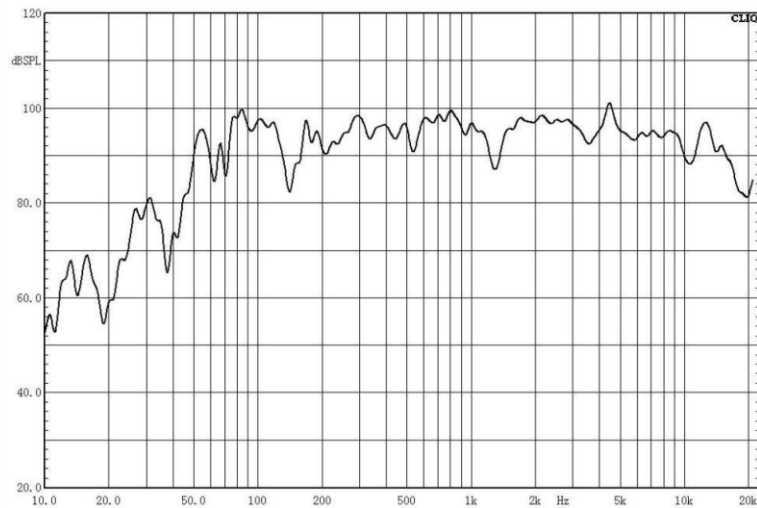

Email: Sales@canscorp.com

Add.: Shop No 5-6, Adinath Alpine building, Plot No. 28 A,
Sector 25, Khandeshwar, Navi Mumbai, Maharastra 410209

Web.: WWW.CANSCORP.COM