

CNS505R PAGING STATION

TECHNICAL DATA SHEET



DESCRIPTION:

CNS505R paging microphone has a condenser microphone. With signal indicators, it can display the working status of each zone. It has RJ45 port and 3.5mm stereo RCA port, as well as RS485 port.

FEATURES:


- Condenser microphone.
- Cardioid polar pattern.
- With signal indicator for working status.
- Five zones selection and all zone selection.
- With 1 Aux input.
- Aux input/Mic/Chime with individual adjustment.
- 1 RJ45 for connection with host.
- Power supply: DC24V.

CNS505R PAGING STATION

SPECIFICATIONS:

Model	CNS505R
Power Supply	24VDC,500mA
MAX. Connection Length	500m
Microphone Type	Condenser microphone
Polar Pattern	Cardioid
Connectors	Rj45, 24VDC power jack, 3.5mm stereo RCA
Frequency Response	-3dB150Hz-22kHz
Input Level MIC	-46dBV,Aux:-10dBV
Output Impedance	Balanced600Ohms
Input Impedance MIC	600Ohms,AUX:50k Ohms
Output Level	10dBV
S/N Ratio	-60dB
Interface	RS-485
Dimensions	460mm×140mm×115mm
Weight	670g

FRONT/REAR PANEL

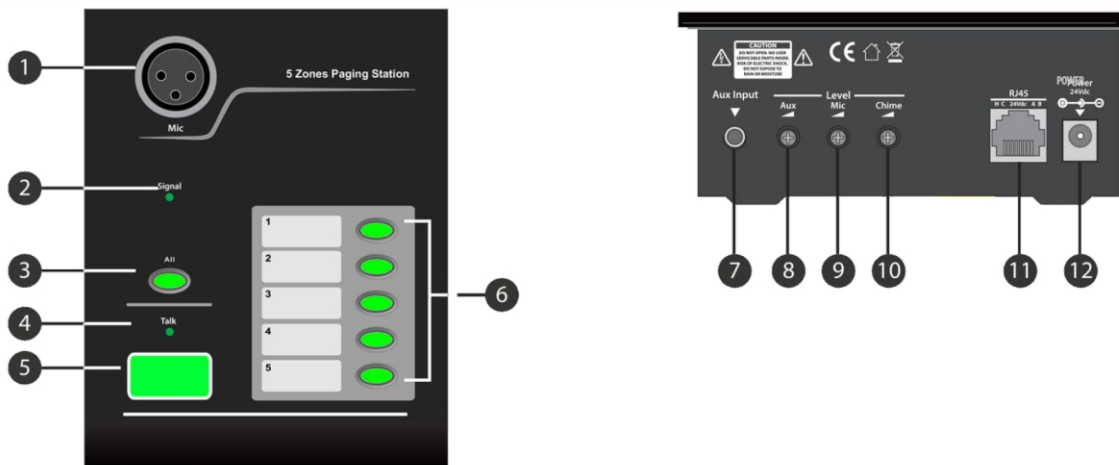

1. Microphone connector || 2. Signal LED || 3. All button || 4. Talk indication
5. Talk button || 6. Zone selector || 7. AUX input || 8. AUX level control
9. Microphone level control
10. Chime volume || 11. RJ45 port

Email: sales@canscorp.com

Add.: Shop No 5-6, Adinath Alpine building, Plot No. 28 A,
Sector 25, Khandeshwar, Navi Mumbai, Maharastra 410209

Web.: WWW.CANSCORP.COM